FEATURING

BRIGHTSTRIP** FOGF



AT A GLANCE


Features

- High brightness: up to 150 lumens per unit
- · Easily customized to length
- Energy efficient
- Long life with zero maintenance
- Full conformal coating assures long term environmental performance
- · Low profile SMD package
- · Easy installation
- · UL & cUL compliant 12V system

Applications

- Edge lighting acrylic
- Slim advertising displays
- Under counter or cabinet lighting
- Architectural lighting
- · Emergency lighting
- · Point of sale
- Accent lighting
- Alternative to fluorescent lighting
- Refrigeration
- In-store fixtures
- Wall washes
- Skirt lighting

BrightStrip™ EDGE is specifically designed for edge lighting acrylic panels in slim advertising displays, architectural elements, perimeter lighting and POP applications. BrightStrip™ EDGE can be used to effectively light almost any surface or space.

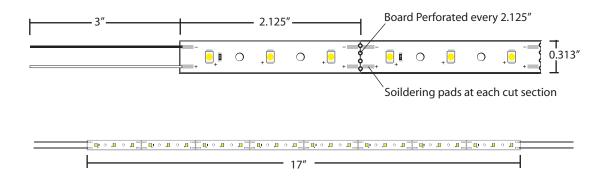

Product Information

Part No.		Beam Pattern (Viewing Angle)	Light Output (Lumen)	Input (V DC)	Current (Amps/Unit)	Power (Watts/Unit)	Length (inches, mm)
AGI-BS-EDGE-DW	6000-6999K white	120°	150	12	0.23	2.76	17" (431.8mm)

Power Supply Solutions

Supply	/ Model	AGI-ADV-60W	AGI-45W-WP-110/220	AGI-ADV-12W	
Colors	Amperage (A per ft.)	(units / sub-units)	(units / sub-units)	(units / sub-units)	
White	0.23	21units / 173 sub-units	15 units / 125 sub-units	4 units / 32 sub-units	

Please consult the Applications Engineering Department for ideas to enhance your lighting project.

Available From